Version: 2.10 30 Nov 2017

# **DALIGate DIN** ArtNet/sACN/DMX to DALI converter



DALIGate DIN is DIN rail mounted converter that converts ArtNET/sACN/DMX signal into DALI protocol to include DALI lighting fixtures into controllable lighting network.

With DIN rail mounting hassle-free installation and ArtNET/sACN/DMX input, DALIGate DIN is ideal as indoor solution for mixed lighting control purposes in theatres, small venues, architectural installations, industrial, warehouse, and agricultural lighting.



DMX Bi-Direct User-Friendly Web Interface









Permanent

Laser Engraving

**Application** 

Control DALI lights by DMX / ArtNet / sACN

### **Advantages**

Work with DMX, ArtNet and sACN

Converting options are channel-to-channel, channelto-device, and channel-to-group

Custom grouping of lights

Automatically detect DALI lights in network through web interface with no extra software

Maximum surge protection – power supply optimized for voltage from 100 to 315 V

Full galvanic isolation of all ports



# **DALIGate DIN**

ArtNet/sACN/DMX to DALI converter

## **Technical Specifications**

#### Mechanical

• Housing: DIN mounted case (8 modules)

• Material: Metal, Plastic

• Dimensions, mm: 142(D) x 105(H) x 75(W)

• Mass: 0.45 kg

• Mounting: Power cabinet

#### Power & Electrical

• Power supply: ~90-250 VAC, 50/60 Hz

• Input Power (max): 5 W

• Mains Fuse: 0.5 A

#### Environmental

• Operating Temperature: -40...+70°C

• Storage Temperature: -50...+80°C

• Operating Relative Humidity (max): 95%

• IP Rating: IP 20

• Certification: CE, RoHS

• Warranty: 36 Month (Return to base)

#### Control / Data Connections

• Supported protocols: DALI, DMX512, RDM, ArtNet I, II,

III, IV/sACN

• Data refresh rate: 44 Hz

#### Inputs / Outputs

• DMX ports: 1 isolated

• DMX connectors: Terminal blocks 15EDGVC

• Controllable output lines: 2 or 4 DALI

• Ethernet port: 10/100 Base-TX

#### Configuration / Indication

• Setup: Web-interface

• Indication: DMX, DALI, Ethernet LEDs

#### **Package Contents**

DALIGate DIN

• Connectors kit

• User guide

### **Product Line**

#### Name

**DALIGate DIN** 

#### Modification

### 2 DALI inputs/outputs, 1 DMX port

4 DALI inputs/outputs, 1 DMX port


#### Product code

DGD-1-DE2DALI DGD-1-DE4DALI

# **DALIGate DIN**

ArtNet/sACN/DMX to DALI converter

### **Connection Scheme**

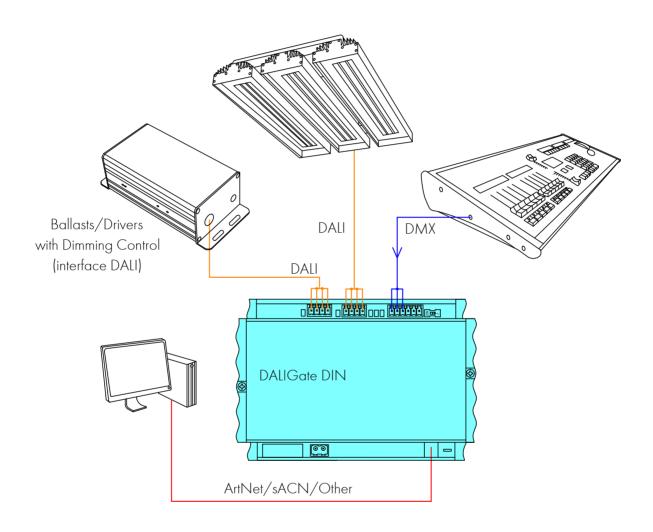

## **Accessories**

#### Name

DIN rail mounting kit Waterproof box (IP65) Ethernet Cable 3m

#### Product code

MCA-1-DIN MCA-1-IP65 DMX-ACC-ETH-0300

#### Disclaimer

To the best of our knowledge, the technical data contained herein is true and accurate at the date of issuance and is subject to change without prior notice. No liability accepted for errors or omissions. Always make sure to use the most recent release and contact Sundrax Electronics to verify correctness before placing your order.