



Splitter Pro Duo


Multi-channel DMX512 splitter/repeater

Splitter PRO DUO is special device with 3 DMX inputs (each with DMX Thru) and 8 DMX outputs that operates as regular splitter with 1 input and 10 outputs as well as two separated 1-to-4 splitters with fail-safe option. All input and output channels have full galvanic isolation. Remote Device Management (RDM) compatible. The device is suitable for indoor use and rack mountable. Splitters are powered by 100-250 V industrial AC mains, power consumption is less than 5 watts.



Key Features

- No buttons
- EtherCON or XLR (customer)
- Supports RDM
- Galvanically isolated ports
- Advanced flexibility in configuring with A and B zones
- DMX Thru at each input
- RDM enable switch



Supports RDM



UltraStart



Galvanic
Isolated Ports



Natural
Heat Convection

Splitter Pro Duo

Multi-channel DMX512 splitter/repeater

Version: 2.0
27 July 2021

Technical Specifications

Mechanical

Housing: Small depth rack mounted

Dimensions, mm: 482(D) x 44(H) x 110(W)

Material: Metal

Mass: 1.2 kg

Mounting: Rack 1 unit

Power & Electrical

Power supply: ~90-250 VAC, 50/60 Hz

Input Power (max): 5 W

Mains Fuse: 0.5 A

Environmental

Operating Temperature: 0...+60°C

Storage Temperature: -50...+70°C

Operating Relative Humidity (max): 95%

IP Rating: IP 20

Certification: CE, RoHS

Warranty: 36 month (return to base)

Control / Data Connections

Supported protocols: DMX512, RDM

DMX data refresh rate: 44 Hz

Inputs / Outputs

DMX Inputs: 1 or 3 (each with Thru port)

DMX Outputs: 8 or 10

Connectors: XLR (5 pins) or etherCON

Configuration / Indication

Indication: LEDs for DMX inputs

Package Contents

Splitter PRO DUO

Power cable

Product Line

Name	Modification	Product code
Splitter Pro DUO	3 DMX inputs/8 DMX outputs (5-pin)	SPPD-5-3D8D
	3 DMX inputs/8 DMX outputs (etherCON)	SPPD-6-3D8D
	3 DMX inputs/8 DMX outputs (3-pin)	SPPD-3-3D8D




+ 44 (0) 208 991 33 19
office@sundrax.com
www.sundrax.com

Splitter Pro Duo

Multi-channel DMX512 splitter/repeater

Version: 2.0
27 July 2021

Connection Scheme

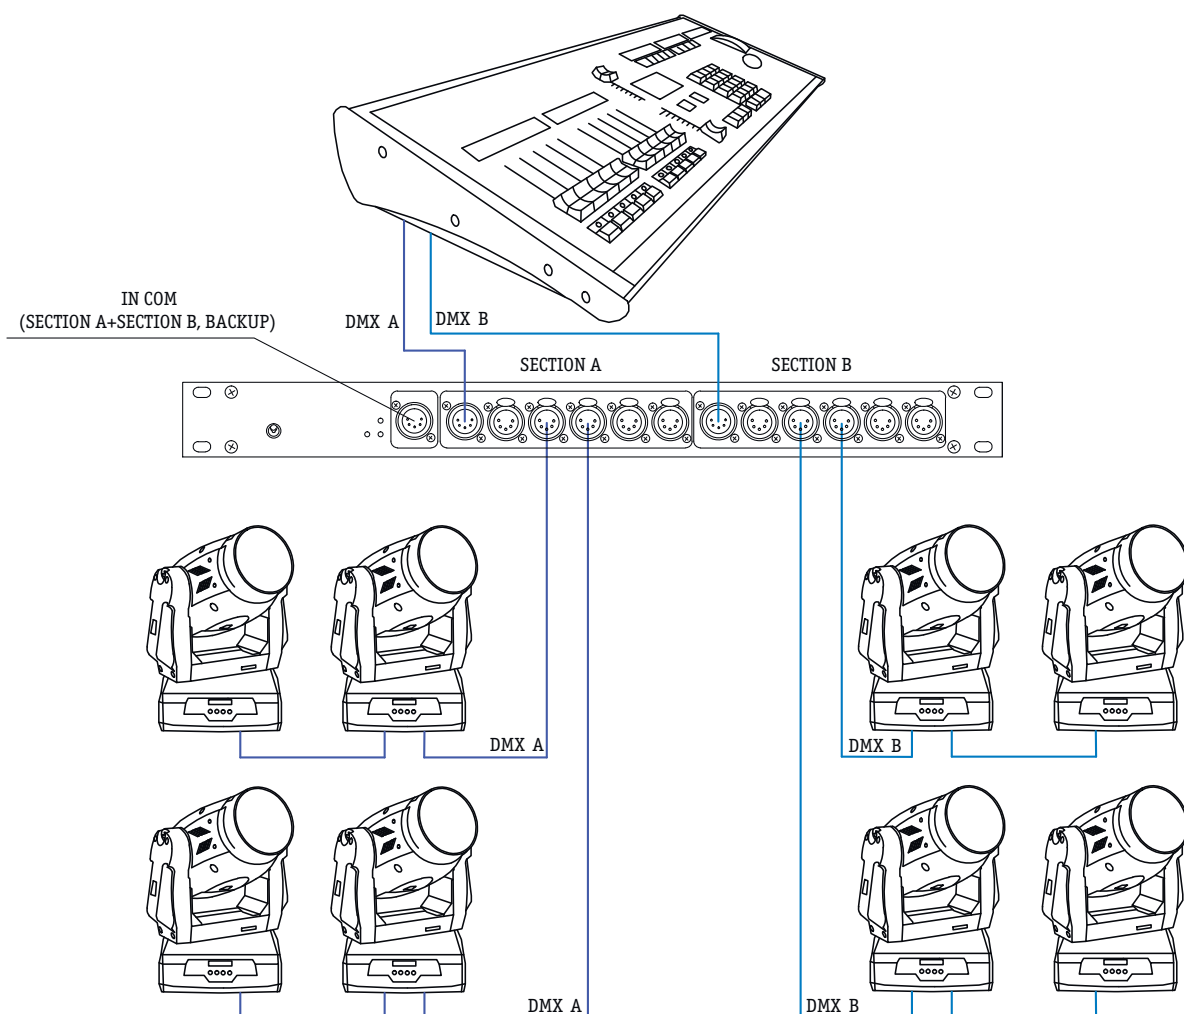

Disclaimer

To the best of our knowledge, the technical data contained herein is true and accurate at the date of issuance and is subject to change without prior notice. No liability accepted for errors or omissions. Always make sure to use the most recent release and contact Sundrax Electronics to verify correctness before placing your order.

Accessories

Name

Truss mounting kit (Pro)

Product code

DMX-MCA-1-TMK



+ 44 (0) 208 991 33 19
office@sundrax.com
www.sundrax.com